

Versatile, high performance forward plate compactor

Premium asphalt plates feature a durable base plate for various applications. A true combination plate for various applications in the 85 kg weight class.

Designed for the compaction of granular and mixed materials with some cohesive content in confined areas such as parking lots, highway and bridge construction, next to structures, curbs, and abutments. This computer designed base plate has a tapered bottom and edges for high speed and excellent manoeuvrability.



V400



V450




POWERED by
HONDA
norm SAE J1349




E-version coming soon

FEATURES AND BENEFITS

- Straight, centre-mounted guide handle offers superior manoeuvrability and can be lowered within inches of the surface to operate plate under obstacles and form work.
- Many lifting points and front lift cage offer easier loading and unloading for operator convenience.
- Compact design, easy to use, cast bottom plate.
- Smooth and flexible.
- Throttle mounted on the operating handle.

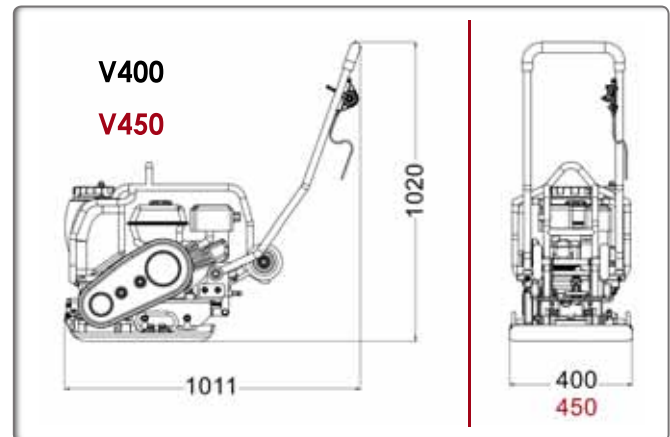

| Code | V400COMBI | V450H2 |
|--|-------------|-------------|
| Model | V400 COMBI | V450 COMBI |
| Operating mass (kg) | 92 | 92 |
| Centrifugal force (kN) | 14 | 14 |
| Plate width (mm) | 450 | 450 |
| Engine | Honda GX160 | Honda GX160 |
| Net power hp (kW) | 4,8 (3,6) | 4,8 (3,6) |
| Rated engine speed (rpm) | 3600 | 3600 |
| Fuel tank capacity (L) | 6,1 | 6,1 |
| Engine oil capacity (L) | 0,6 | 0,6 |
| Fuel consumption at rated power (L/h - rpm) | 1,4 - 3600 | 1,4 - 3600 |
| Water tank (L) | 13 | 13 |
| Speed (m/min) | 21 | 21 |
| Amplitude (mm) | 0,89 | 0,89 |
| Frequency (Hz) | 95 | 95 |
| Sound pressure level dB (A) | 91 | 91 |
| Vibrations* (m/s²) | 2,62 | 2,62 |
| Surface capacity (m²/h) | 685 | 685 |
| * Minimum vibration levels measured to EN500-4 | | |
| Certified power SAE J 1349 | | |

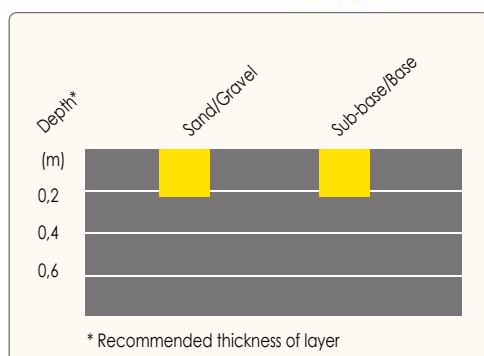

Option: Accessory - stone paving pad



OPTION : PAVING PAD

Code PPV-PAD400

Code PPV-PAD450