

Surface Screed

Machines that enable professionals to literally and figuratively – go any way they want. They are light yet robust and easy to handle therefore, manoeuvring is simple. The machines guarantee maximum reliability and high productivity. Perfectly levelled, flat floors; regardless of surface size.

FEATURES AND BENEFITS

- Maximum reliability and productivity.
- Easy to use.
- For perfectly flat floors.

POWERED by
HONDA
norm SAE J1349



Code	PACLI10660.2	PACLI10.660.3	10.654.3
Model	VVL200	VVL300	VVL -E 230V
Dimensions L x W x H (mm)	2000 x 430 x 295		
Weight (kg)	17	23	20
Engine	Honda GX25 - 4 stroke-gasoline		Electric
Engine power - (W)	740		1,4 ch - 0,04 KW
Frequency (Hz)	100		50
Certified power SAE J 1349			

Concrete floats, Hand tools

Smooth or texture wet concrete to the required finish. Just twist the long handle and the swivel head angles the blades for pushing or pulling across the slab.

BIG BLUE-TOO : tempered 'Blue' steel blade with rounded corners c/w Swivel & 3 snap fitting handles.

TEXAS CONCRETE PLACER: Aluminium head and handle.


FRESNO BROOM : with articulated turn knucklehead & shaft, combination tool for applying a consistent brushed finish. c/w Swivel & 3 snap fitting handles.

BULLFLOAT: lightweight magnesium alloy blade with reinforced section to prevent warping. c/w Swivel & 3 snap fitting handles.

FEATURES AND BENEFITS

- Telescopic and easy to assemble.
- Delivered in three components; blade, articulation and three lengths of telescopic and interchangeable handles.

Code	BT111992C	BT009989	BT750055	BT350084
Model	Big Blue-Too	Texas concrete placer	Fresno broom	Bull float
Dimensions L x l (mm)	1200 x 300	495 x 115	900 x 220	1200 x 200

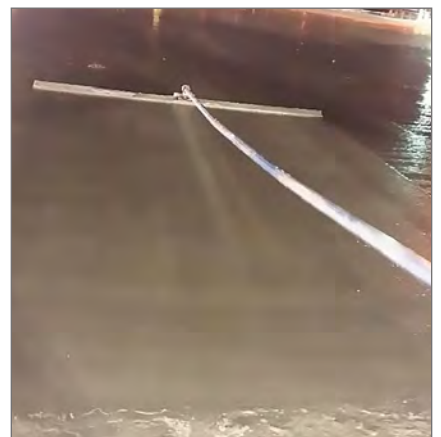

TEXAS CONCRETE PLACER



FRESNO WITH BROOM



BIG BLUE-TOO



BULL FLOAT



Worm Drive pitch control
Code : BT000055



Snaplock extension handle
Code : BT003300