

PACLITE Electric multipurpose grinders

PACLITE resurfacers are versatile, perfect for a wide range of applications: removing coatings, sanding and polishing concrete.

They are also able to carry out finishes with working widths of 400 or 500 mm. Ideal for both small and large surfaces. Perfect for rental and for professional applications because of their many advantages. Available in single-phase and three-phase versions, they are suitable for industrial and domestic applications. They can be easily folded and disassembled without tools, for easy transport and storage.



FEATURES AND BENEFITS

PAC-GRIND 400

- Stable design with big wheels.
- Easily separated into two compact pieces for transportation.
- Effective and very low sound level.
- Easy to use.
- Twisting handle, electrical box with control unit
- Quick release for diamond segments
- 4-8 diamond segments according to need.
- Wet/dry grinding.

PAC-GRIND 500

- Planetary gear.
- Stable grinding.
- Big wheels.

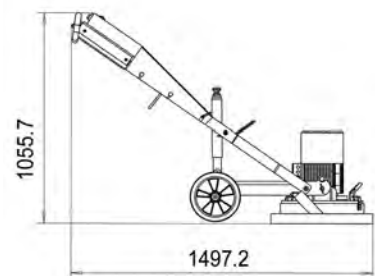

Code	TP500	TP400
Model	PAC-GRIND500	PAC-GRIND400
Power hp (kW)	3 (2,2)	5,5 (4)
Tension (V-Hz)	400-3-(50)	400 -3-(50)
Rated current (A)	16	16
Grinding diameter Ø (mm)	500	400
Number of grinding segments	9	4-8
Grinding disc Ø (mm)	3 x 150	400
Speed (RPM) (min-1)	900	1400
Weight (kg)	135	125
Option	230V-1-50Hz	No



Model	Code	Ref.	DIAMOND TOOLS
PAC-GRIND 400	TRX400	A	16 Grit hard floor 8 pieces light surface grinding
PAC-GRIND 400	TRX410	B	Epoxy or grout/bitum soft material 8 pieces deep grinding
PAC-GRIND 400	TRX420	C	Epoxy or grout/bitum soft material 8 pieces light surface correction
PAC-GRIND 500	TRX500	D	Grit soft or hard floors 9 pieces light surface grinding
PAC-GRIND 500	TRX 510	E	9 Pieces epoxy or grout/bitum soft material deep grinding
PAC-GRIND 500	TRX520	F	9 Pieces epoxy or grout / hard material removing light surface correction



PAC-GRIND 400 & PAC-GRIND 500 Standard equipment: dust cap, key for changing disc, 50 mm attachment port for an external vacuum hose, 2 m cable.